


PassTestking


- ✓ 24/7 customer support, Secure shopping site
- ✓ Free One year updates to match real exam scenarios
- ✓ If you failed your exam after buying our products we will refund the full amount back to you.

[Download Demo](#)




ONLINE TEST ENGINE
Online
Best Practice Material

- ✓ Online Tool, Convenient, easy to study.
- ✓ Instant Online Access
- ✓ Supports All Web Browsers
- ✓ Practice Online Anytime
- ✓ Test History and Performance Review
- ✓ Supports Windows / Mac / Android / iOS, etc.




SELF TEST SOFTWARE
DESKTOP TEST ENGINE
Soft
Best Practice Material


- ✓ Installable Software Application
- ✓ Simulates Real Exam Environment
- ✓ Builds Exam Confidence
- ✓ Supports MS Operating System
- ✓ Two Modes For Practice
- ✓ Practice Offline Anytime





PRACTICE PDF
PDF FORMAT
PDF
Best Practice Material

- ✓ Printable PDF Format
- ✓ Prepared by IT Experts
- ✓ Instant Access to Download
- ✓ Study Anywhere, Anytime
- ✓ 365 Days Free Updates
- ✓ Free PDF Demo Available


48923+
Happy Clients


48923+
Shares


97846+
Downloads


9999+
Years in Business

<http://www.passtestking.com/>

Newest Exam Practice Questions Dumps added from PassTestking

Exam : 642-533

Title : Implementing Cisco Intrusion Prevention System (IPS)

Vendors : Cisco

Version : DEMO

1. You think users on your corporate network are disguising the use of file-sharing applications by tunneling the traffic through port 80. How can you configure your Cisco IPS Sensor to identify and stop this activity?

- A. Enable all signatures in the Service HTTP engine.
- B. Assign the Deny Packet Inline action to all signatures in the Service HTTP engine.
- C. Enable all signatures in the Service HTTP engine. Then create an event action override that adds the Deny Packet Inline action to events triggered by these signatures if the traffic originates from your corporate network.
- D. Enable the alarm for the non-HTTP traffic signature. Then create an Event Action Override that adds the Deny Packet Inline action to events triggered by the signature if the traffic originates from your corporate network.
- E. Enable both the HTTP application policy and the alarm on non-HTTP traffic signature. Answer: E

2. A user with which user account role on a Cisco IPS Sensor can log into the native operating system shell for advanced troubleshooting purposes when directed to do so by Cisco TAC?

- A. administrator
- B. operator
- C. viewer
- D. service
- E. root
- F. super

Answer: D

3. Which character must precede a variable to indicate that you are using a variable rather than a string?

- A. percent sign
- B. dollar sign
- C. ampersand
- D. pound sign
- E. asterisk

Answer: B

4. Which statement accurately describes Cisco IPS Sensor automatic signature and service pack updates?

- A. The Cisco IPS Sensor can automatically download service pack and signature updates from Cisco.com.
- B. The Cisco IPS Sensor can download signature and service pack updates only from an FTP or HTTP server.
- C. You must download service pack and signature updates from Cisco.com to a locally accessible server before they can be automatically applied to your Cisco IPS Sensor.
- D. When you configure automatic updates, the Cisco IPS Sensor checks Cisco.com for updates hourly.
- E. If multiple signature or service pack updates are available when the sensor checks for an update, the Cisco IPS Sensor installs the first update it detects.


Answer: C

5. LAB

You are the network administrator in charge of the IPS sensors for a travel agency. You have upgraded to IPS software version 6.0.

On the morning of May 24, 2007, your assistant notified you that he recently tried to tune some of the signatures for sig0 in an effort to mitigate attacks. From the assistant description of the tuning he performed, you decided that there is a need to return all signatures for sig0 to their default settings.

After returning all the signatures for sig0 to the default setting, backing up of the current configurations is also

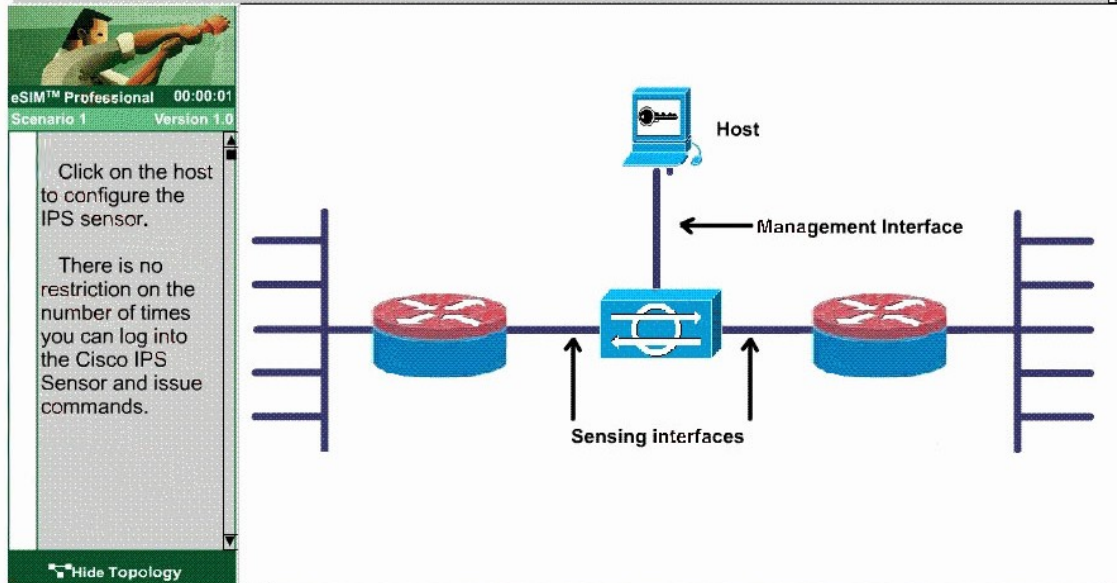

Answer: Sorry , No Correct Answer!

6. LAB

Answer: Sorry , No Correct Answer!

Scenario	You are the network administrator for a shoe manufacturer. The company has a DMZ network consisting of a mission-critical web server and a DNS server. You want to configure the inline 4240 sensor protecting these servers to place the highest possible value on the web server and DNS server. This will increase the risk rating of attacks against these two servers on the DMZ. You want to then configure the sensor to deny all connections with a risk rating of 80 or above if the connection attempt triggers any signature. You want to exempt your management station from this policy so that traffic from the management station is not dropped. These configurations will be done on the rules0 instance.
IPS Sensor	
Topology	<p>Complete the following tasks:</p> <ul style="list-style-type: none"> Assign the highest rating to the DMZ Web and DNS server Deny all connections if Risk Rating is 80 or above and exempt the Management Station traffic from this policy

Scenario

IPS Sensor

Topology

Scenario

IPS Sensor

Topology

Home
Configuration
Monitoring
Back
Forward
Refresh
Help

Device Information

Host Name:	ips	IP Address:	172.26.26.53
IPS Version:	6.0(1)E1	Device Type:	IPS-4240-K9
IDM Version:	6.0.1	Total Memory:	1893 MB
Bypass Mode:	Auto_off	Total Data Storage:	166.8 MB
Missed Packets Percentage:	0	Total Sensing Interface:	4

Interface Status

Interface	Link	Enabled	Speed	Mode
Management0/0	Up	Yes	Auto_100	Management
GigabitEthernet0/3	Down	Yes	N/A	Unpaired
GigabitEthernet0/2	Down	Yes	N/A	Unpaired
GigabitEthernet0/1	Down	Yes	N/A	Unpaired
GigabitEthernet0/0	Up	Yes	Auto_100	Inline-vlan-pair

Select an interface to view received and transmitted packets count.

System Resources Status

CPU

Average CPU Usage (percent)

0%
15:19:43

Memory

Memory Usage (MB)

387MB
15:19:43

Memory (MB)
Used: 1387 Free: 506 Total: 1893

Alert Summary

High (0) Med. (0) Low (0) Info. (0) Threat Rating > 80 (0)

Alert Profile

Legend: High (Red), Med. (Yellow), Low (Green), Info. (Blue), Threat Rating > 80 (Purple)

Auto refresh every 10 seconds

Home
Configuration
Monitoring
Back
Forward
Refresh
Help

Sensor Setup

- Network
- Allowed Hosts
- SSH
- Certificates
- Time
- Users
- Interface Configuration
- Analysis Engine
- Policy Engine

Network

Specify the network and communication parameters for the sensor.

Hostname:	<input type="text" value="ips"/>
IP Address:	<input type="text" value="172.26.26.53"/>
Network Mask:	<input type="text" value="255.255.255.0"/>

The image shows two parts of a Cisco IDM configuration environment. The top part is a configuration window for a sensor, and the bottom part is a network topology diagram.

Configuration Window:

- Virtual Sensors:**
 - Global Variables
 - Policies
 - Blocking
 - SNMP
 - General Configuration
 - Traps Configuration
 - External Product Interface
 - Auto Update
 - Restore Defaults
 - Reboot Sensor
 - Shutdown Sensor
 - Update Sensor
 - Licensing
- Default Route:** 172.26.26.151
- FTP Timeout:** 300
- (checked)
- Web Server Settings:**
 - Enable TLS/SSL
 - Web server port:
- Remote Access:**
 - Telnet is not a secure access service and is disabled by default.
 - Enable Telnet
- Buttons:** Apply, Reset

Network Topology Diagram:

- Management station:** 10.0.1.12
- Corporate Network Sensor:** Connected to the Management station and a switch.
- DMZ Sensor:** Connected to a switch and the Internet.
- WWW server:** 172.16.1.3
- DNS server:** 172.16.1.4
- Internet:** Represented by a cloud icon.

7. How can you clear events from the event store?

- A. You do not need to clear the event store; it is a circular log file, so once it reaches the maximum size it will be overwritten by new events.
- B. You must use the CLI clear events command.
- C. If you have Administrator privileges, you can do this by selecting Monitoring > Events > Reset button in Cisco IDM.
- D. You should select File > Clear IDM Cache in Cisco IDM.
- E. You cannot clear events from the event store; they must be moved off the system using the copy command.

Answer: B

8. Refer to the exhibit. Based on the partial output shown, which of these statements is true?

Mod	Card Type	Model
0	ASA 5540 Adaptive Security Appliance	ASA5540
1	ASA 5500 Series Security Services Module-20	ASA-SSM-20

Mod	MAC Address Range	Hw Version	Fw Ver	Sw Ver
0	000b.fcf8.c538 to 000b.fcf8.c53c	1.0	1.0(10)0	7.3(0)149
1	000b.fcf8.0144 to 000b.fcf8.0144	1.0	1.0(10)0	6.0(1)E1

Mod	Status	Data Plane Status	Compatibility
0	Up Sys	Not Applicable	
1	Up	Up	

- A. The module installed in slot 1 needs to be a type 5540 module to be compatible with the ASA 5540 Adaptive Security Appliance module type.
- B. The module installed in slot 1 needs to be upgraded to the same software revision as module 0 or it will not be recognized.
- C. Module 0 system services are not running.
- D. There is a Cisco IPS security services module installed.

Answer: D

9. Which action does the copy /erase ftp://172.26.26.1/sensor_config01 current-config command perform?

- A. erases the sensor_config01 file on the FTP server and replaces it with the current configuration file from the Cisco IPS Sensor
- B. copies and saves the running configuration to the FTP server and replaces it with the source configuration file
- C. overwrites the backup configuration and applies the source configuration file to the system default configuration
- D. merges the source configuration file with the current configuration

Answer: C

10. Which of the following is a valid file name for a Cisco IPS 6.0 system image?

- A. IPS-K9-pkg-6.0-sys_img.sys
- B. IPS-4240-K9-img-6.0-sys.sys
- C. IPS-K9-cd-11-a-6.0-1-E1.img

D. IPS-4240-K9-sys-1.1-a-6.0-1-E1.img

Answer: D